




NTN Bearing Manufacturing of Canada

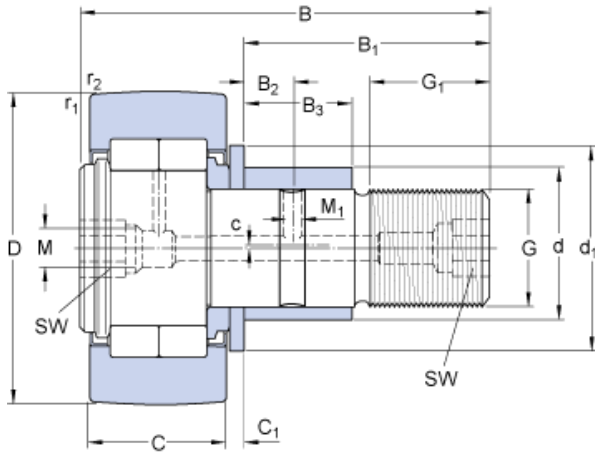

20 mm x 35 mm x 52 mm SKF NUKRE 35 A cylindrical roller bearings

Bearing No. NUKRE 35 A

NUKRE 35 A Bearing 2D drawings and 3D CAD models

Size	20x35x52 mm
Bore Diameter	20 mm
Outer Diameter	35 mm
Width	52 mm
D	35 mm
d	20 mm
B	52 mm
C	18 mm
B ₁	29.5 mm
B ₂	7.8 mm
B ₃	12 mm
C ₁	3.8 mm
d ₁	27.6 mm
G	M 16x1.5
G ₁	17 mm
M	6 mm
M ₁	3 mm
SW	8 mm
c	1 mm
r _{1,2} - min.	0.6 mm
Basic dynamic load rating - C	16.8 kN
Basic static load rating - C ₀	17.6 kN
Fatigue load limit - P _u	2 kN



NTN Bearing Manufacturing of Canada

Maximum dynamic radial loads - F_r	8.6 kN
Maximum static radial loads - F_{0r}	12.2 kN
Limiting speed	5000 r/min
Mass support roller	0.177 kg
Recommended tightening torque	58 N · m
Grease fitting	NIP A2x7.5
Hexagonal nut	M 16x1.5
Category	Bearings
Inventory	0.0
Manufacturer Name	SKF
Minimum Buy Quantity	N/A
Weight / Kilogram	0.217
Product Group	B04144
B_1	29.5 mm
B_2	7.8 mm
B_3	12 mm
C_1	3.8 mm
d_1	27.6 mm
G_1	17 mm
M_1	3 mm
$r_{1,2}$ min.	0.6 mm
Basic dynamic load rating C	16.8 kN
Basic static load rating C_0	17.6 kN
Fatigue load limit P_u	2 kN
Maximum dynamic radial loads F_r max.	8.65 kN
Maximum static radial loads F_{0r} max.	12.2 kN
Mass cam follower	0.18 kg
Lubrication adapter	AP 8